




Electric
Self-Propelled
Scissor Lift

GS™-2032

A stable, reliable
and easy to operate
lift with a built-in
platform extension.

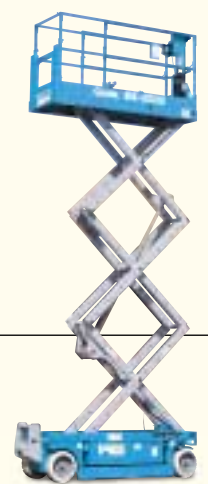

GS-2032

- The solid steel deck platform has a slip-resistant surface.
- Heavy duty square steel guardrails maximise durability.
- Lubrication-free, service-free pivot points.
- Built-in lanyard attachment points.
- Weather resistant, impact resistant, injection-moulded Joystick Carrier / Controller box operates from the platform or the ground.
- Low noise level allows operation in quiet work environments.
- High angle steering provides excellent manoeuvrability.

- Swing-out battery box and power module allow easy access to componentry.
- Variable speed motor extends battery and motor life by using only the energy needed to do the required work.
- On-board troubleshooting diagnostics notify the operators of possible fault conditions.

Standard Features


- GS-2032 has 7.9 m (26 ft) working height
- 1 m (39 in) roll-out platform extension
- Compact 81 cm (32 in) width
- 363 kg (800 lb) lift capacity
- Proportional controls for lift and drive functions
- Automatic 25 amp battery charger
- Manual platform lowering valve
- Emergency stop switches at both platform and ground controls
- Drive speed interlock limits speed while elevated
- Multiple disc brakes provide smooth deceleration
- Manual brake release
- Pothole guards
- Non-marking tyres
- AC wiring to platform
- Tilt sensor with an audible alarm
- Beeper horn
- Hour metre

Options and Accessories

- Motion alarm
- Power inverter
- Platform swing gate
- Air line to platform
- EE rating
- Dual flashing beacon
- Automotive horn
- Folding guardrails with platform swing gate
- Maintenance-free batteries
- Pipe cradle

Standards Compliance

- ANSI/SIA A92.6
- CE compliance option
- AS 1418.10
- CSA CAN3-B354.2-M82

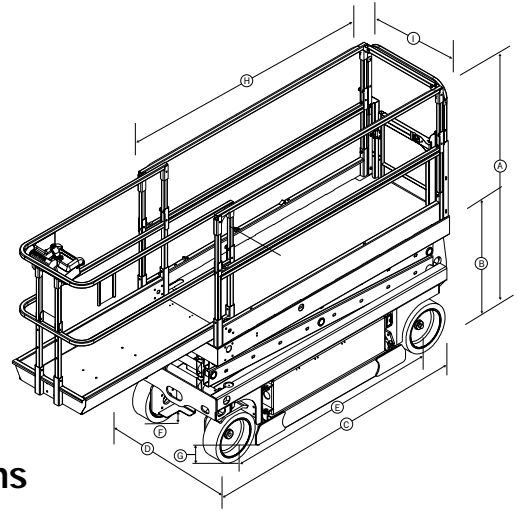

Specifications

Model	GS-2032	Metric	US
Working height*	8.1 m		26 ft
Platform height	6.1 m		20 ft
Sliding rail design (standard)			
(A) Height stowed, ANSI, CSA	2 m		78 in
Height stowed, CE	2.11 m		83 in
Height stowed, rails lowered	1.93 m		76 in
Fold down rail design (optional)			
Height stowed	2.11 m		83 in
Height stowed, rails folded	1.73 m		68 in
(B) Platform height - stowed	98 cm		38 1/2 in
(C) Length - stowed	2.44 m		96 in
(D) Width	81 cm		32 in
(E) Wheelbase	1.85 m		73 in
(F) Ground clearance - at machine centre	10 cm		4 in
(G) Ground clearance - pothole guards deployed		2 cm	7/8 in
(H) Platform length	2.26 m		89 in
(I) Platform width	79 cm		31 in
Platform length extended	3.25 m		128 in
Guardrail height			
ANSI, CSA	1 m		39 in
CE	1.1 m		43 in
Toeboard height	15 cm		6 in
Lift capacity	363 kg		800 lb
Extension deck lift capacity	113 kg		250 lb
Turning radius outside	2.34 m		92 in
Turning radius inside	zero		
Power source	24V (4 6V 245AH batteries)		
Drive speed - stowed	3.5 km/h		2.2 mph
Drive speed - raised	0.8 km/h		0.5 mph
Raise/lower speed	30/26 sec		
Controls	24V DC proportional		
Tyres (solid rubber)	38 x 13 x 28 cm		15 x 5 x 11 in
Gradeability	30%		30%
Drive	dual front wheel		
Multiple disc brakes	dual rear wheel		
Weight	1,589 kg		3,503 lb

*The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.



A division of FORCE CORP
FREECALL: 1800 674 777