

**Snorkel**

# Wildcat<sup>®</sup> SL 20

The narrow width of these machines allows them to fit through most standard doorways, and the wide variety of standard features makes them ideal for slab-type construction, building renovation, or maintenance work of all types.



## SPECIFICATIONS

<b>Working Height</b>	26'	7.9 m
<b>Platform</b>		
<b>Height</b>	20'	6.1 m
<b>Capacity*</b>	800 lbs.	363 kg
<b>Size</b>	30" x 90"	76 x 229 cm
<b>Guardrail Height</b>	41"	104 cm
<b>Toeboard Height</b>	6"	15 cm
<b>Stowed Platform Height</b>	37½"	95 cm
<b>Stowed Overall Height</b>	78½"	199 cm
<b>Overall Width</b>	33"	84 cm
<b>Overall Length</b>	91"	231 cm
<b>Wheelbase</b>	74"	188 cm
<b>Turning Radius</b>		
<b>Inside</b>	30"	76 cm
<b>Outside</b>	101"	257 cm
<b>Gradeability</b>		20%
<b>Drive Speed</b>		
<b>Speed No. 1 Elevated</b>	0.4 mph	0.6 kph
<b>Speed No. 2 Stowed</b>	1.2 mph	1.9 kph
<b>Speed No. 3 Stowed</b>	2.1 mph	3.4 kph
<b>Platform Lift Speed</b>		20 sec. minimum
<b>(3 speed control)</b>		
<b>Ground Clearance (Approx.)</b>		
<b>Platform Stowed/Pothole</b>		
<b>Protector Raised</b>	3¼"	8.3 cm
<b>Platform Raised/Pothole</b>		
<b>Protector Lowered</b>	¾"	1.9 cm
<b>Tire Size</b>		4 x 16
<b>Type</b>		Solid Rubber
<b>Weight (approx.)</b>	3,750 lbs	1,701 kg
<b>Shipping Cube</b>		
<b>With Guardrails</b>	139 ft. <sup>3</sup>	3.9 m <sup>3</sup>

\*Rated load on roll-out extension deck is 250 lbs. (113 kg)

- Automatically activated pothole protection
- Built-in level sensor interlocks
- Fits through most standard doorways
- 3' roll-out extension
- Printed circuit board with on-board LED diagnostics
- Joystick with finger-grip control on removable console
- Responsive center pivot-type steering
- 3-speed drive/3-speed lift
- Dual wheel drive system
- Drive motion alarm
- 2-wheel parking brakes
- Built-in scissor arm safety support
- Drivable at full work height
- Swing-out trays for batteries and hydraulics
- Lift out battery tray
- Non-marking tires
- Battery powered with built-in smart charger
- Forklift loadable from 3 sides
- 60 month factory warranty





**Snorkel**

# Wildcat® SL 20

## Narrow Slab SCISSORS

### Optional Equipment

- Swinging gate
- 125 volt GFCI AC outlet at platform
- D-Ring lanyard attachments
- Operator horn
- Flashing light
- Battery condition indicator
- AC generator
- EE Rating
- 240 Amp/hr battery

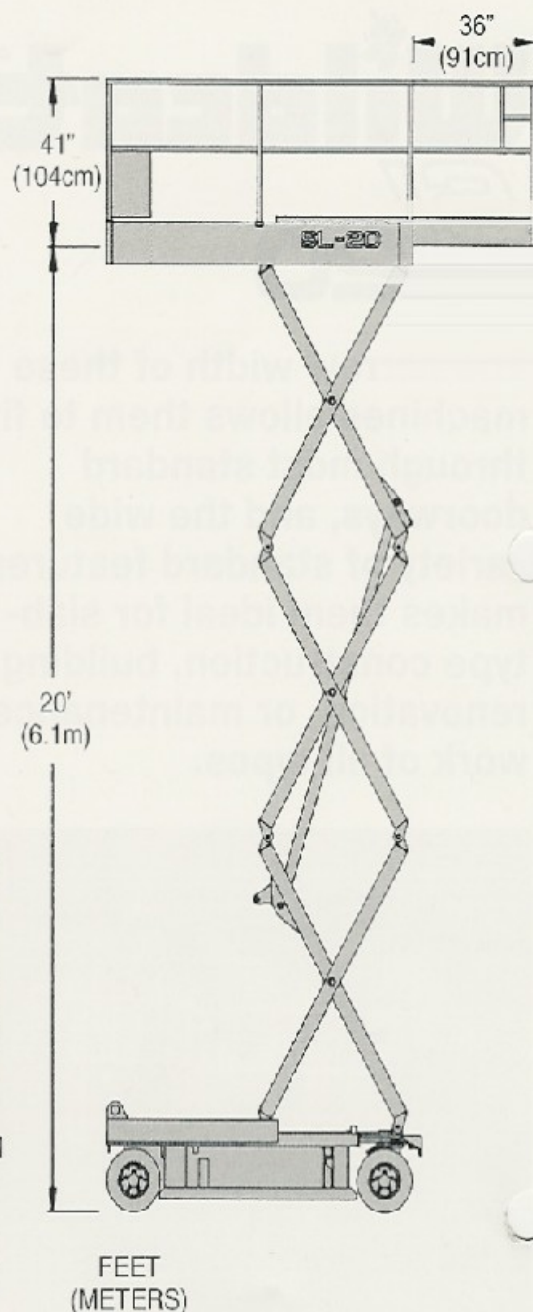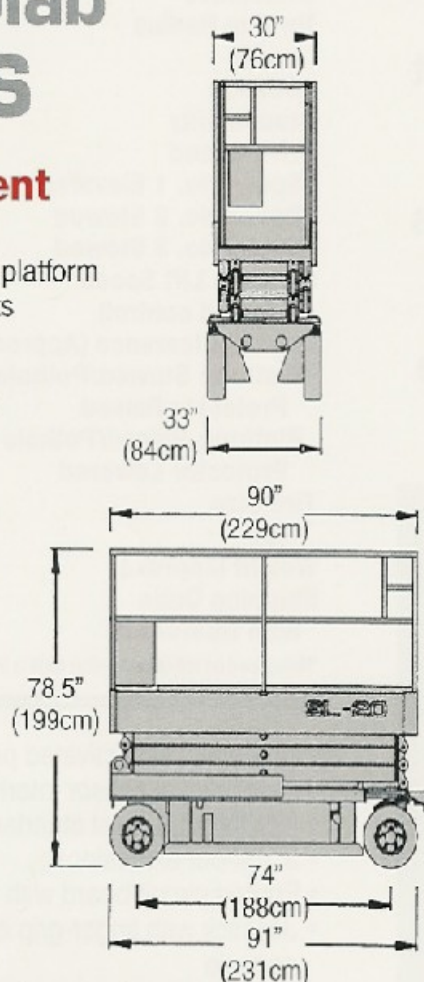

**DANGER:** Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine.

Only qualified and trained operators are to be authorized to use and operate a work platform.

Aerial work platforms must be elevated only on firm, level surface.

Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating/Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

**FORCE**  
ACCESS

A division of FORCE CORP  
FREECALL: 1800 674 777