


# GR™ -12 -15 -20

## Specifications

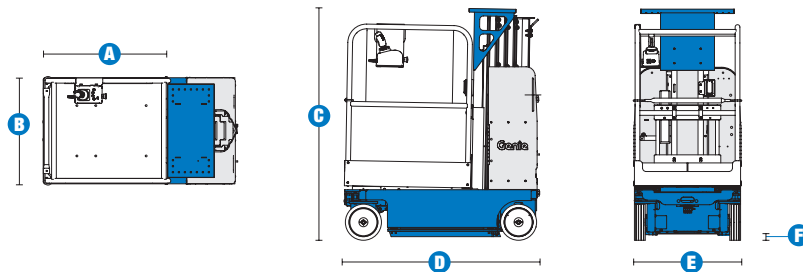

MODELS	GR™-12		GR™-15		GR™-20	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height*	17 ft 5 in	5.48 m	20 ft 8 in	6.47 m	25 ft 11 in	8.07 m
Platform height	11 ft 5 in	3.48 m	14 ft 8 in	4.47 m	19 ft 11 in	6.07 m
<b>A B</b> Platform dimensions (l x w)						
Standard	35 x 29.5 in	.88 x .75 m	35 x 29.5 in	.88 x .75 m	35 x 29.5 in	.88 x .75 m
Standard with extension	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m
Stock picker	35 x 28.75 in	.88 x .73 m	35 x 28.75 in	.88 x .73 m	35 x 28.75 in	.88 x .73 m
Stock picker w/adjustable tray	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m
Standard AWP	27 x 26 in	.69 x .51 m	27 x 26 in	.69 x .51 m	27 x 26 in	.69 x .51 m
Narrow AWP	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m
Standard fiberglass	29 x 26.5 in	.74 x .67 m	29 x 26.5 in	.74 x .67 m	29 x 26.5 in	.74 x .67 m
Narrow fiberglass	26 x 22 in	.66 x .56 m	26 x 22 in	.66 x .56 m	26 x 22 in	.66 x .56 m
<b>C</b> Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m	6 ft 6 in	1.98 m
<b>D</b> Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
<b>E</b> Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m	2 ft 7.5 in	.80 m
<b>F</b> Ground clearance - center	2.5 in	.06 m	2.5 in	.06 m	2.5 in	.06 m

PRODUCTIVITY						
Lift capacity	500 lbs	227 kg	500 lbs	227 kg	350 lbs	159 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		30%	
Turning radius	zero		zero		zero	
Controls	24 V DC proportional		24 V DC proportional		24 V DC proportional	
Tires	non-marking		non-marking		non-marking	

POWER						
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	2.2 gal	8.33 L	2.2 gal	8.33 L	2.2 gal	8.33 L

WEIGHT***						
	1,581 lbs	717 kg	2,192 lbs	994 kg	2,451 lbs	1,112 kg

STANDARDS COMPLIANCE	ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10
----------------------	---

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

\*\*\* Weight will vary depending on options and/or country standards.

# Features

## EASILY CONFIGURED TO MEET YOUR NEEDS

### PLATFORM OPTIONS

- Standard platform
- Sliding mid-rail extension deck
- Gated extension deck
- Stock Picker platform
- Stock Picker platform with adjustable tray
- Stock Picker platform with rear parcel tray (GR-12 and GR-15 only)
- Standard AWP platform
- Narrow AWP platform
- Standard AWP fiberglass platform
- Narrow AWP fiberglass platform

### POWER

- 24 V (four 6 V 225 Ah batteries)

### TIRE

- Non-marking solid tires

## STANDARD FEATURES

### MEASUREMENTS

#### GR™-12

- 17 ft 5 in (5.48 m) working height
- 11 ft 5 in (3.48 m) platform height
- Up to 500 lb (227 kg) lift capacity

#### GR™-15

- 20 ft 8 in (6.47 m) working height
- 14 ft 8 in (4.47 m) platform height
- Up to 500 lb (227 kg) lift capacity

#### GR™-20

- 25 ft 11 in (8.07 m) working height
- 19 ft 11 in (6.07 m) platform height
- Up to 350 lb (159 kg) lift capacity

### PRODUCTIVITY

- Patented rigid mast system
- Compact base 29.5 x 53 in (.75 m x 1.35 m)
- Standard sliding midrail platform 29.5 x 35 in (.75 x .88 m)
- Low 15 in (.38 m) platform entry height
- Adjustable work station tray
- Fully proportional lift and drive controls
- Onboard diagnostic system
- AC power to platform
- Descent and tilt alarm
- Auxiliary platform lowering
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear covers for easy access to all major electrical and hydraulic components
- Large forklift pockets 2.5 x 5.125 in (.06 x .13 m)
- Tie down attachment points
- Non-marking solid tires

### POWER

- Automatic 25 amp battery charger



## OPTIONS & ACCESSORIES

### PRODUCTIVITY

- Sliding mid-rail extension deck
- Gated extension deck
- Stock Picker platform with adjustable tray
- Stock Picker rear parcel tray (GR-12 and -15)
- Stock Picker bike rack
- Standard AWP platform
- Narrow AWP platform
- Standard AWP fiberglass platform
- Narrow AWP fiberglass platform
- Fluorescent tube caddy
- Motion alarm and flashing beacons
- Automotive horn

### POWER

- 800 watt inverter (120-230 V AC/50-60 Hz)
- Maintenance-free batteries

